



Polyvinyl Alcohol Barrier Coatings for Silicone Coated Release Base Paper



Polyvinyl Alcohol Technical Bulletin

Polyvinyl alcohol (PVOH) as a surface size provides excellent holdout properties for silicone coated release base paper. Due to its superior film forming capabilities, super and fully hydrolyzed grades of polyvinyl alcohol are recommended to impart the necessary sheet Gurley density, Cobb-Unger holdout, and water resistance properties required for this application. In addition, PVOH is inert to silicone curing systems and dries to a transparent film.

Among the many property requirements for release base paper which is to be silicone coated, good hold out of the silicone coating ranks as one of the more important. Silicone coatings, whether solvent, 100% solids, or emulsion based, are very effective as release coats when applied as thin films. However, due their relative expense and need for a continuous coating without pinholes, the silicone coating must remain on the surface rather than be absorbed into the base sheet. To prevent silicone absorption, surface application of a barrier coat is often utilized and Selvol™ PVOH is among the best barrier coats available for a variety of reasons.

The performance benefits of PVOH are related to its excellent film forming capabilities and solvent resistance properties. As a film former, PVOH helps seal the sheet surface, closing off pores and decreasing sheet porosity. Low porosity, high density paper is generally required for good silicone holdout. In addition, PVOH has excellent organic solvent and water resistance properties. And finally, PVOH is chemically inert to the catalyst systems used for curing silicone coatings, has excellent adhesion to both cellulose and silicone through hydroxyl hydrogen bonding, and is transparent after drying on the sheet surface.

Recommended PVOH grades for Silicone Base Sheet

Super hydrolyzed (99.3+% hydrolysis) and fully hydrolyzed (98.0 - 98.8% hydrolysis) grades are recommended for holdout of all silicone coating types. These grades provide the best characteristics for silicone coating as follows:

- good solvent holdout
- good water resistance
- low to no foaming
- excellent film forming characteristics

The actual grade selected will depend on the viscosity requirement for the application equipment used to apply the PVOH.

PVOH Grade	Hydrolysis (%)	4% Solution Viscosity (cPs)
Selvol 125	99.3+	28.0 - 32.0
Selvol 325	98.0 - 98.8	28.0 - 32.0
Selvol 310	98.0 - 98.8	9.0 - 11.0
Selvol 107	98.0 - 98.8	5.5 - 6.5

Base Sheet Liner Requirements

PVOH, as a clear surface size barrier coat, can find utility in two of the important liner types, Glassine and Super Calendered Kraft (SCK) papers. Some typical requirements for Glassine and the SCK liner types include:

	Glassine	SCK
Gurley Density sec/100cc	> 20,000	> 12,500
Unger Absorption	0.5 - 0.9 g/m ² absorbed	0.7 - 1.0 g/m ² absorbed
Cobb Absorption	< 25 g/m ²	< 25 g/m ²
Transparency	45 - 55%	40 - 44%

Gurley Density

Gurley density (or decreased sheet porosity) is the result of proper fiber selection and controlled fiber refining, followed by sheet densification in the wet press and calendar stack. A surface size application of PVOH reduces the sheet porosity (or increases the sheet density) even further by closing the sheet pores. PVOH reduces the sheet porosity better than other water soluble binder types as shown in Graph 1, right.

Unger-Cobb Absorption

The Unger-Cobb test is an indirect method of measuring the holdout of a potential silicone coating by substituting castor oil for silicone. In this test, the lower the absorption, the better the holdout. PVOH provides the best holdout due to its excellent oil and solvent barrier properties coupled with its film forming characteristics. Graph 2, right, demonstrates the superior Unger absorption of PVOH as compared to other water soluble binder types.

Cobb-Water Absorption

Water resistance is another important attribute for silicone coated base paper. Good water holdout translates to good holdout for silicone emulsions. In addition, water resistance is important to prevent calendering pick for glassine papers which are often remoisturized off the paper machine prior to supercalendering. Graph 3, right, demonstrates the Cobb-Water resistance of PVOH versus other water soluble types. The water resistance of PVOH can be improved further with the use of a crosslinker.

Figure 1

Gurley Density After Super Calendering

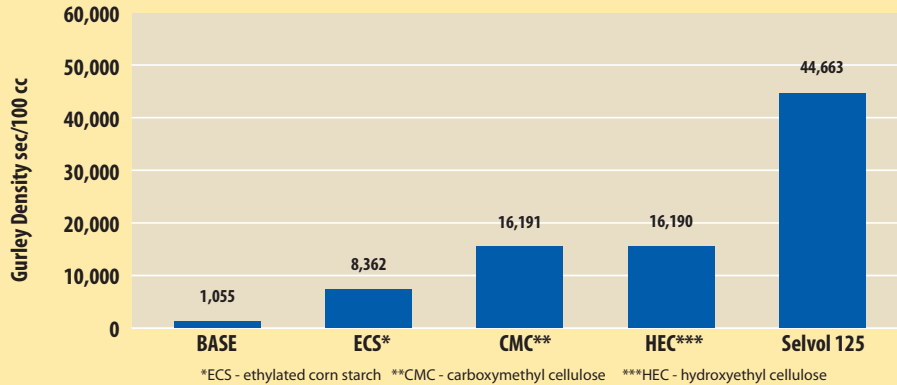


Figure 2

Unger Absorption After Super Calendering


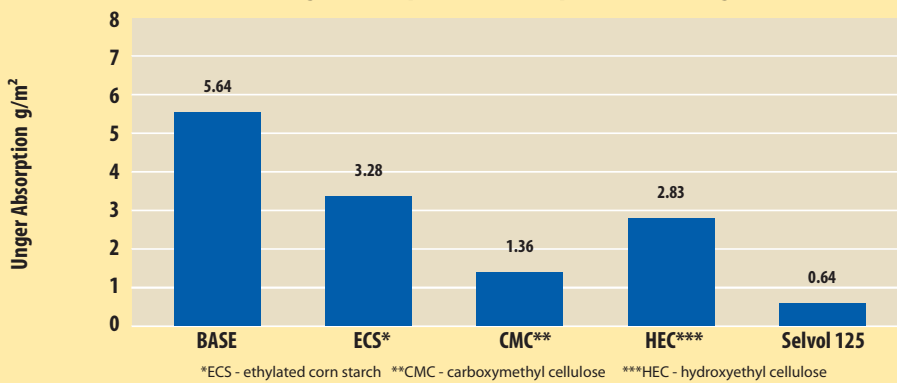


Figure 3

Cobb-Water Absorption

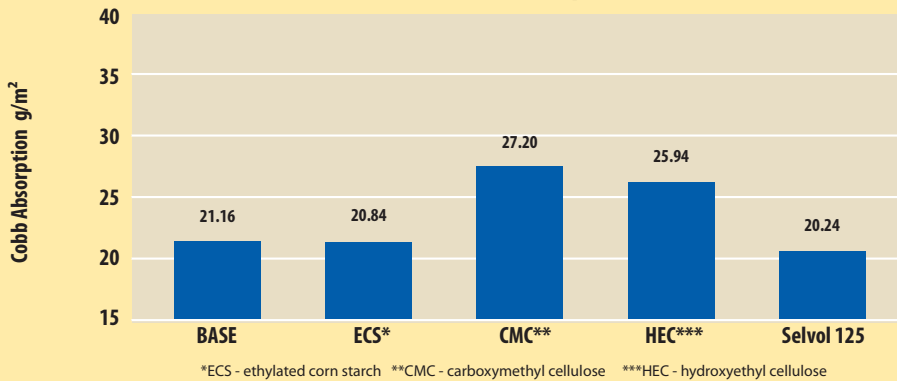

Crosslinking Additives

Crosslinking aids such as glyoxal can be added to the PVOH formulation to improve the water resistance. Crosslinking will prevent picking of the PVOH surface size on the supercalender rolls when remoisturizing the sheet at levels of 15 to 20% required for densification of glassine papers. Glyoxal addition levels of 2 to 6% dry on dry PVOH is recommended.

Other Important PVOH Characteristics

PVOH dries as a transparent, tough film with good tensile strength properties. These attributes are important for high-speed labeling applications where sheet transparency is required for photocell detection and tensile strength is required to prevent web breaks. In addition, PVOH is inert to the metal catalysts used in the silicone cure systems. Therefore, it does not interfere with final release properties.

Method of Application

PVOH can be applied to the sheet surface in a number of ways including rod application, metering size press and conventional size press. These methods allow the wet PVOH layer to remain on the sheet surface where the dried film can provide the silicone barrier properties. Typically, a PVOH coat weight of 0.5 to 2.5 g/m² will be sufficient to achieve the end use properties required for good silicone holdout.

International Offices

North America:

Sekisui Specialty Chemicals America
1603 West LBJ Freeway
Dallas, TX 75234-6034
Tel +1-972-277-2901
Fax +1-972-277-2907
www.sekisui-sc.com

Europe:

Sekisui Specialty Chemicals Europe S.L.
Ctra. N-340 Km. 1157 Apdo. 1388
43080 Tarragona
Spain
Tel +34 977549899
Fax +34 977544982

Visit www.selvol.com for more information
about our products.

To the best of our knowledge, the information contained herein is accurate. However, neither Sekisui nor any of its affiliates assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material and whether there is any infringement of patents is the sole responsibility of the user. All chemicals may present unknown health hazards and should be used with caution. Although certain hazards may be described in this publication, we cannot guarantee that these are the only hazards that exist. Users of any chemical should satisfy themselves by independent investigation of current scientific and medical knowledge that the material can be used safely. In addition, no certification or claim is made as to the status, under any law or regulation, including but not limited to the Toxic Substances Control Act, of either the chemicals discussed above or any subsequent polymerization or reaction products that result from a formulation containing them.