



Selvol™ Polyvinyl Alcohol for Paper and Paperboard Containing Secondary Fiber

Polyvinyl Alcohol Technical Bulletin

Selvol polyvinyl alcohol, as a surface-applied strength additive, can be used to help overcome the strength losses created by the continued reuse of secondary fiber.



The push for secondary fiber usage has challenged the papermaker with another set of technical issues in today's environmentally conscious world. Most all paper and paperboard grades now include some percentage of recycled fiber in their furnish. The continued reuse of these reclaimed fibers reduces the overall physical strength of the paper or board due to a number of factors. These include a reduction in fiber length from repeated refining operations, a loss in fiber-fiber bonding due to a reduction in hydrogen bonding and a loss of fiber swellability from repeated drying operations.¹

Polyvinyl alcohol (PVOH) is the strongest binder in the paper industry.² As a surface-applied additive, polyvinyl alcohol can provide both sheet physical strength and surface strength to a paper or paperboard containing secondary fiber. In addition, since PVOH is applied at the surface after sheet formation, balancing the wet end chemistry for polyvinyl alcohol is not necessary. Finally, PVOH is in tune with the environment due to its complete biodegradability.

¹ Ellis R. L. and Sedlachek E., TAPPI 76(2): 143(1993).


² TAPPI Monogram No. 37; Synthetic Binders in Paper Coatings.

Selvol™ Polyvinyl Alcohol for Paper and Paperboard Containing Secondary Fiber



Laboratory Studies

Mullen burst and MIT fold tests were performed comparing the strength of Selvol polyvinyl alcohol to hydroxyethylated corn starch when used as a surface-applied sizing agent. The Selvol polyvinyl alcohol grades used in the tests were high, medium or intermediate viscosities (HV, MV, IV), and they were either super, fully or partially hydrolyzed (SH, FH, PH).

The results of the tests, shown in Figures 1 and 2, demonstrate the superior strength provided by the PVOH. Uncoated printing papers containing secondary fiber may be prone to an increase in fiber picking and linting during printing due to the decrease in fiber bonding.

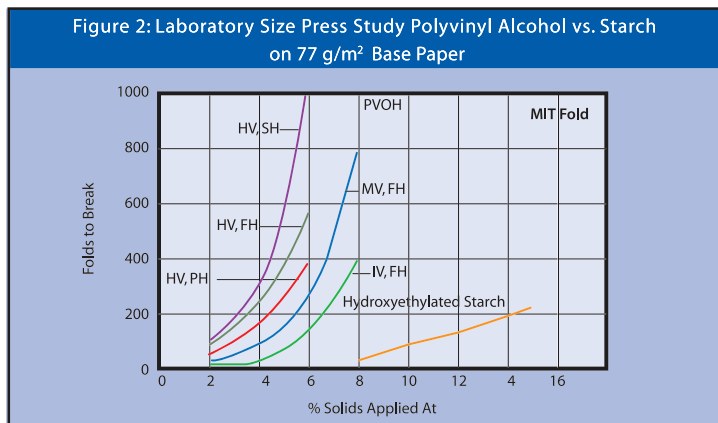

The surface application of PVOH can greatly improve surface strength characteristics. Figure 3 demonstrates the improvement in Dennison Wax Pick with increasing percentages of PVOH in a PVOH/starch solution.

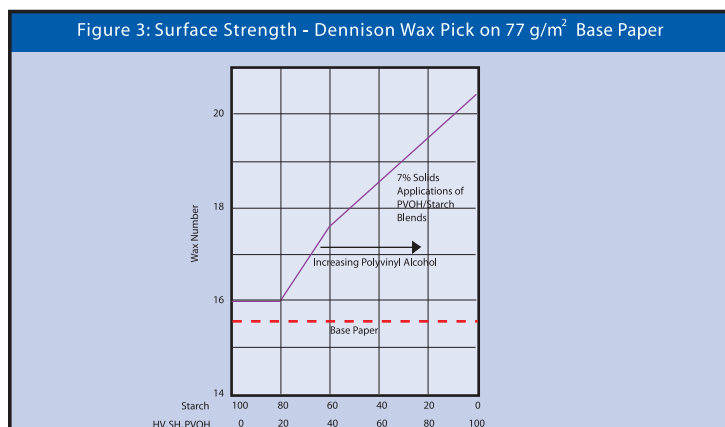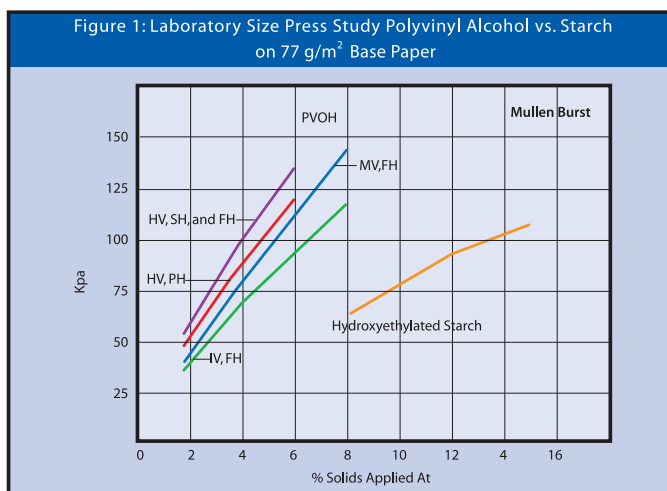

Other properties, including tensile strength, water resistance, Gurley Porosity, oil and grease resistance, abrasion resistance and optical brightener efficiency, will also improve with the use of PVOH.

International Offices

North America:

Sekisui Specialty Chemicals America
1603 West LBJ Freeway
Dallas, TX 75234-6034
Tel +1-972-277-2901
Fax +1-972-277-2907
www.sekisui-sc.com

Europe:

Sekisui Specialty Chemicals Europe S.L.
Ctra. N-340 Km. 1157 Apdo. 1388
43080 Tarragona
Spain
Tel +34 977549899
Fax +34 977544982

Visit www.selvol.com for more information about our products.

To the best of our knowledge, the information contained herein is accurate. However, neither Sekisui nor any of its affiliates assumes any liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of suitability of any material and whether there is any infringement of patents is the sole responsibility of the user. All chemicals may present unknown health hazards and should be used with caution. Although certain hazards may be described in this publication, we cannot guarantee that these are the only hazards that exist. Users of any chemical should satisfy themselves by independent investigation of current scientific and medical knowledge that the material can be used safely. In addition, no certification or claim is made as to the status, under any law or regulation including but not limited to the toxic Substances Control Act, of either the chemicals discussed above or any subsequent polymerization or reaction products that result from a formulation containing them.